



## COMPONENTS

Scabbard Main Frame (A)

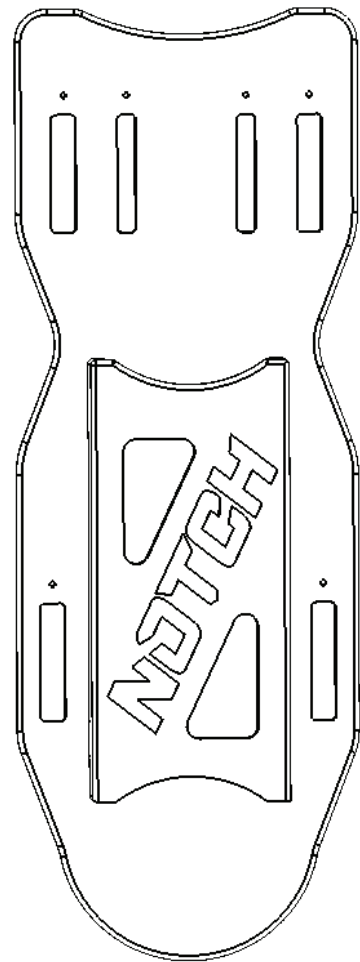


Inside Hooks & Screws (B)

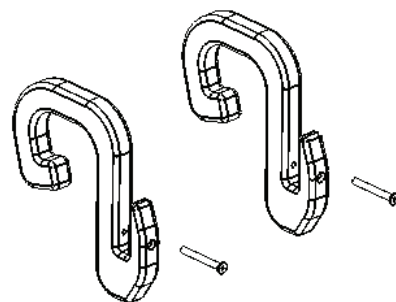


Outside Mount Kit  
(contains C, D, E)  
sold separately as item # 40706


Outside Hooks & Screws (C)

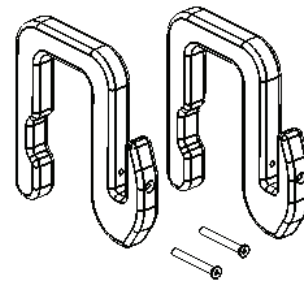

Outside Tabs & Screws (D)

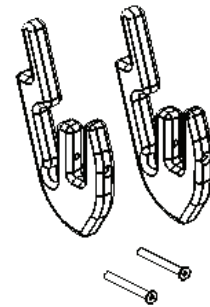


Outside Bump Stops & Screws (E)

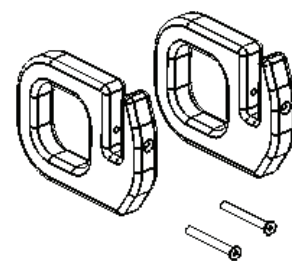


## ASSEMBLY - Inside Mount

Figure 1.1

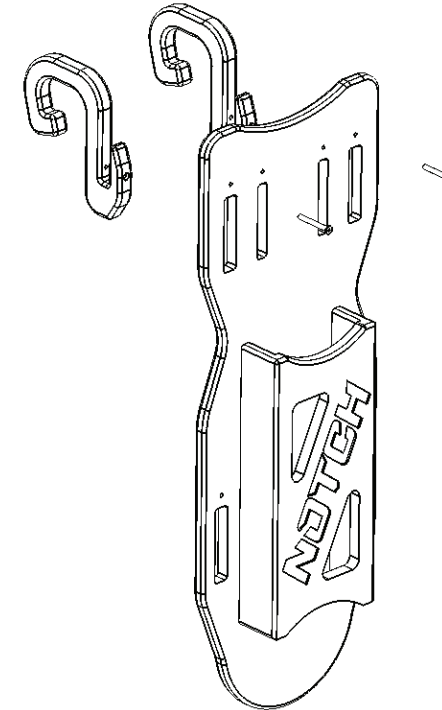


1. Locate Main Frame (A). Align Inside Hooks (B) with the outside set of cut slots in the main frame (1.1).
2. Attach hooks to the main frame ensuring alignment of the screw holes (1.2). Note: May require mild tap with rubber mallet. Using provided stainless steel Screws (B) secure hooks to the main frame.

Figure 1.2

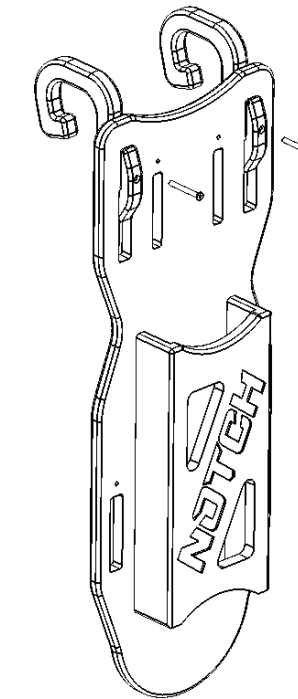


**INSTALLATION - Hang Fully Assembled scabbard on the inside of the bucket basket ensuring hooks are resting on basket rim.**

Fully Assembled

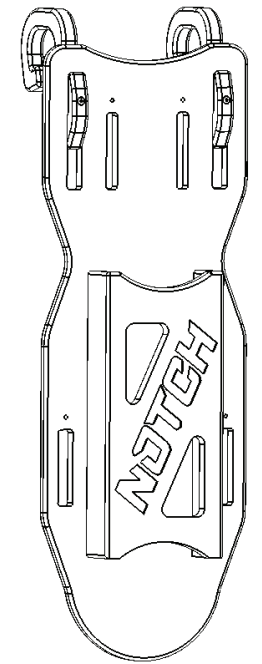

## ASSEMBLY - Outside Mount (sold separately as kit, item # 40706)

Figure 2.1

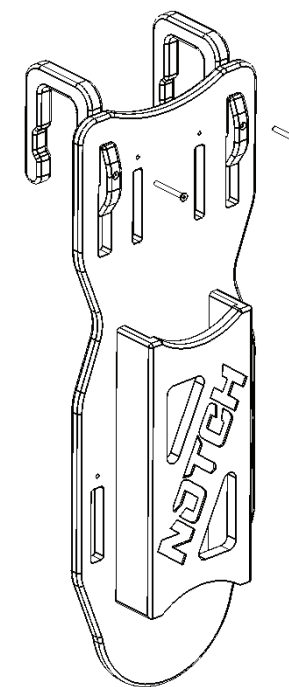

1. Locate Main Frame (A). Align Outside Hooks (C) with the outside set of cut slots in the main frame (2.1) ensuring proper screw alignment.
2. Attach Outside Bump Stops (E) to the main frame (2.2).
3. Attach Outside Tabs (D) to the inside set of cut slots in the main frame (2.3) ensuring proper screw alignment.
4. Tighten all connections. Note: Some connections may require a mild tap with a rubber mallet.

Figure 2.2


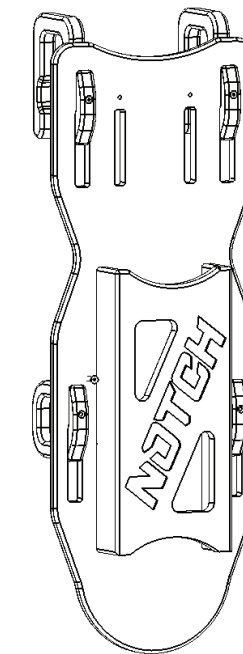


Figure 2.3



**INSTALLATION - Hang Fully Assembled scabbard on the outside of the bucket basket ensuring outside tabs are positioned under the basket rim.**

Fully Assembled

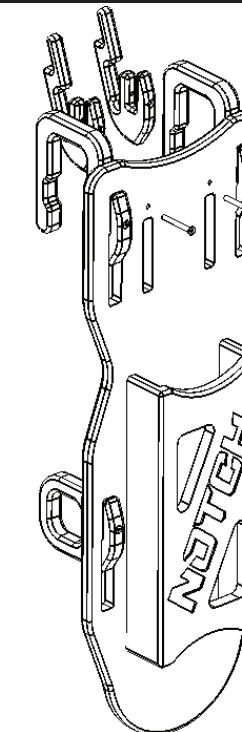