

## FELCO 5 Green

Pruning shear - Good performance - Basic model

Made in Switzerland by FELCO



25mm/1in.



225mm/8.9in. 310g/10.9oz.



- **Reliable:** sturdy steel handles / blade and anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced
- **Efficient:** easy cutting adjustment
- **Ergonomic:** non-slip coating

Our recommendation (1★: Recommended, 2★: Strongly recommended, 3★: Best fit)

Viticulture	★	★	★
Arboriculture	★	★	★
Horticulture	★	★	★
Parks and Gardens	★	★	★
Nursery	★	★	★
Small hand	★	★	★
Large hand	★	★	★
Left-handed	★	★	★

## Accessories



FELCO 902  
Sharpening tool  
Sharpening stone



FELCO 903  
Sharpening tool  
Sharpener



FELCO 910  
Holster  
Leather - With belt loop and clip



FELCO 912  
Holster  
Leather - With belt clip



FELCO 913  
Holster  
In mock leather - With belt loop












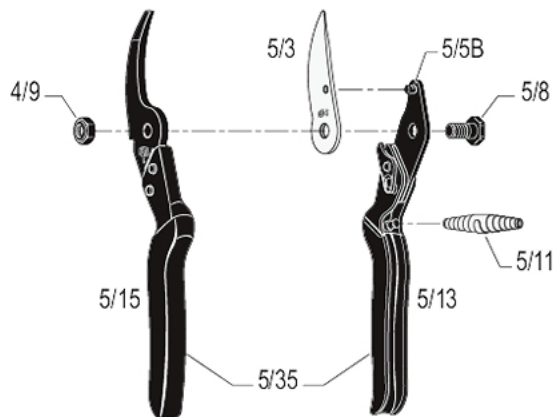




FELCO 980  
Maintenance product  
Spray



FELCO 990  
Maintenance product  
Grease

## Spare parts



	REF.	Designation	Composition	UCC bar code
	5/3	Blade	1x 5/3	 7 83929 40002 0
	5/91	Kit	2x 5/11	 7 83929 40037 2
	5/94	Kit	1x 4/9 + 1x 5/8	 7 83929 40038 9
	5/13	Handle without blade	1x 5/13 + 1x 5/5B + 1x 5/35	
	5/15	Handle with anvil-blade	1x 5/15 + 1x 5/35	
	5/35	Plastic coating for blade handle / anvil-blade handle	1x 5/35	
	5/5B	Rivet for blade	1x 5/5B	
	5/8	Bolt	1x 5/8	
	4/9	Nut	1x 4/9	
	5/11	White spring	1x 5/11	

## Maintenance



### Cleaning

It is advisable to clean your tool after each use.

If your tool is particularly dirty or subject to rusting after exposure to moisture, do not delay cleaning.



### Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.



### Sharpening

It is advisable to sharpen your tool at least once a day, but if you feel that your tool is not cutting as well as usual, sharpen it right away!



### Dismantling

It is advisable to dismantle your tool on a regular basis, but at the very latest when it appears to be jammed.

---

## Replacement parts



### Changing the blade

When the blade and the anvil-blade no longer cross, or when the blade is badly damaged, it is advisable to change it.

Regulate the working of the blade and anvil-blade by adjusting the tightening of the nut. The blade should rub against the anvil-blade over 2/3 of its length.



### Changing the thumb catch

When the thumb catch is damaged and loosens when used, even when the screw is readjusted, change it.

---