Tufftalk M Over-the-Head Earmuff **Quick Start Guide**

Mesh Intercom Button

DC Power Charging & Firmware Upgrade Port

Status LED

Center Button

ENGLISH

Getting Started

all through your headset. With built-in Bluetooth® capabilities, Audio Multitasking™, HD speakers and a microphone using Advanced Noise Control™, technology has never felt so minimal or freeing. BLUETOOTH 4.1 MESH INTERCOM™ 1.1 KM / 0.7 MILES* 命 INTERCOM **MULTI-WAY AUDIO MULTITASKING™** INTERCOM 400 M / 430 YARDS*

> **ADVANCED NOISE** CONTROL

MUSIC SHARING

* in open terrain


Ride Connected

Blast your favorite tunes, talk over the intercom with your buddies.

- 1. This product comes with a Quick Start Guide, which is a basic version of the User's Guide. A FULL VERSION OF THE USER'S GUIDE CAN BE DOWNLOADED AT SENA.COM.
- 2. Update this product for free with the latest firmware to fully enjoy the new advanced features built into this product. Visit sena.com to see how to update your product. Replacing the Ear Pads of the Tufftalk N
- 3. Users can follow Sena on Facebook, YouTube, Twitter and Instagram to receive the most up to date information on products. helpful tips and all other announcements regarding Sena products.


Sena Technologies, Inc.

Customer Support: support.sena.com

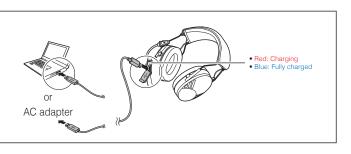

Use your fingers to remove the ear pads and insert the included ear pads.

Sena Utility App



- Music, FM Radio, Device settings, Quick Start Guide, and User's Guide.
- Download
- Android: Google Play Store > 'Sena Utility'
- iOS: App Store > 'Sena Utility'

Sena Device Manager

The **Sena Device Manager** allows you to upgrade the firmware and configure its settings directly from your PC or Apple computer. Download the **Sena Device Manager** from **sena.com**.

Button Operation

Power On/Off

Battery Check







70 ~ 100%

0 ~ 30%





Enter
0 0 0 0 PIN

Press and hold the (+) Button and Center Button for 10 seconds

Phone, Music Pairing

Music Operation

|

when the Tufftalk M is turned off.





Mobile Phone Call Making and Answering










































1.0.0

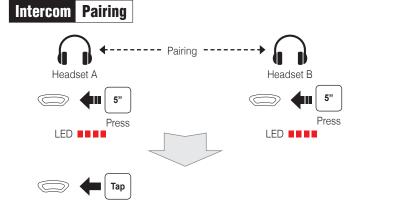

Intercom Start/End



Mesh Intercom On/Off

When **Mesh Intercom** is enabled, the **Tufftalk M** will automatically connect to nearby Tufftalk M users and allow them to talk to each other by pressing the **Mesh Intercom Button**.



Mesh Intercom Open Mesh

When **Mesh Intercom** is enabled, the headset will be in **Open Mesh™** (default: channel 1) initially.

Open Mesh Channel Setting

If the **Open Mesh** communication experiences interference because other groups are also using the channel 1 (default), change the channel. You can select one of 1 to 9 channels.

Using the Button

Enter into the Channel Setting



Navigate between the channel $(1 \rightarrow 2 \rightarrow \cdots \rightarrow 8 \rightarrow 9 \rightarrow Exit \rightarrow 1 \rightarrow \cdots)$

Save the channel



Using the Sena Utility App

You can select the channel through the **Sena Utility App**.

Mesh Intercom Group Mesh


A **Group Mesh™** is a closed network of headsets that allows users to create, leave, join, or rejoin a group intercom conversation without pairing each headset.

Group Mesh Mesh Grouping

A private group can be made with up to 24 users.

Creating a Group Mesh


1. Users who want to create a **Group Mesh** can simultaneously press the Mesh Intercom Button for 5 seconds.

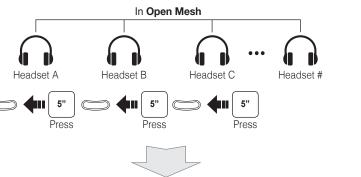

2. When headsets complete **Mesh Grouping**, headsets automatically switch from Open Mesh to Group Mesh, and users automatically create and join the Group Mesh.

Joining an Existing Group Mesh

1. Users (A, B) who want to join an **Existing Group Mesh** and one (C) of the users in the Existing Group Mesh simultaneously press the Mesh Intercom Button for 5 seconds

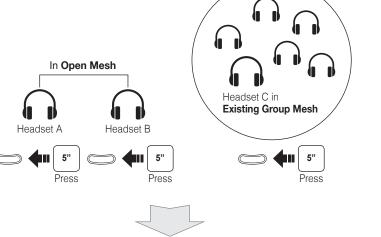

2. When headsets complete **Mesh Grouping**, headsets automatically switch from Open Mesh to Group Mesh, and users (A. B) automatically join the existing Group Mesh.

Mesh Intercom Reset Mesh

If a headset in an Open Mesh or Group Mesh resets the Mesh, they

The mute and unmute functions only work if **Bluetooth Intercom** o

will automatically return to Open Mesh (default: channel 1)

8"

Microphone Mute/Unmute

Тар

Mesh Intercom is on.

Radio On/Off

Radio Seek Stations

Тар

Double Tap

Radio Scan Up FM Band





Configuration Menu





Troubleshooting

Factory Reset

If you want to restore the headset to factory default settings, use the Factory Reset in the configuration menu. The headset automatically restores the default settings and turns off.

Fault Reset

If the headset is not working properly for any reason, push the pin-hole reset button located below the Center Button



Quick Reference

Putton Command

Quick Reference

lype	Operation	Button Command
Basic	Power on	Press the Center Button and the (+) Button for 1 second
Function	Power off	Tap the Center Button and the (+) Button
	Volume up/down	Tap the (+) Button or the (-) Button
	Answer mobile phone call	Tap the Center Button
Mobile	End mobile phone call	Press the Center Button for 2 seconds
Phone	Voice dial	Press the Center Button for 3 seconds
	Speed dial	Press the (+) Button for 3 seconds
	Reject incoming call	Press the Center Button for 2 seconds
Music	Play/Pause Bluetooth music	Press the Center Button for 1 second
iviuSIC	Track forward/back	Press the (+) Button or the (-) Button for 1 second

Time

Operation

	Туре	Operation	Button Command
-	Mesh Intercom	Mesh Intercom on/off	Tap the Mesh Intercom Button
		Channel setting	Double tap the Mesh Intercom Button
		Mesh Grouping	Press the Mesh Intercom Button for 5 seconds
		Reset Mesh	Press the Mesh Intercom Button for 8 seconds
	Intercom	Intercom pairing	Press the Center Button for 5 seconds
			Tap the Center Button of any one of the two headsets
		Start/End each intercom	Tap the Center Button
	FM Radio	FM radio on/off	Press the (-) Button for 1 second
		Select preset	Press the Center Button for 1 second
		Seek stations	Double tap the (+) Button or the (-) Button
		Scan up FM band/stop	Press the (+) Button for 1 second

scanning

D00112 1.0.0 EN December2019