

Buckingham

MANUFACTURING CO., INC.


INSTRUCTIONS FOR MODEL 35033 FOOTPLATE

The Buckingham footplate attaches to most steel climbers with ease.

Each footplate is specially designed to fit the left and right climber.

Each footplate consists of a top and bottom plate, two star washers, and two fasteners.

ASSEMBLE FOOTPLATE to climber as follows:

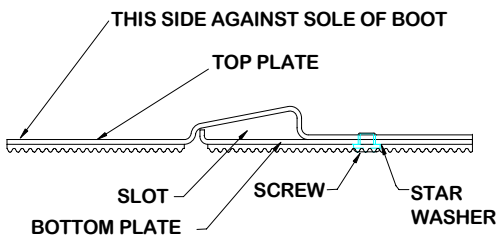

- Remove the bottom plate from the complete footplate assembly by removing the two screws
- Match the climbers (left and right) to the corresponding footplate.
- Place the climber stirrup into the slot in the top plate.
- Align the bottom plate holes to the top plate holes and insert the two screws making sure the star washers are between the screw head and bottom plate.
- The plates are designed to swivel slightly on the climber stirrup to allow for ease of movement when working aloft on the pole.

CAUTIONS :

The rubber sole is **not** intended for dielectric protection, but to prevent the metal bottom from sliding on stone and ice.

The footplate is **not** designed for walking. OSHA states “climbers are to be removed when going from pole to pole”.

DO NOT USE footplate with aluminum climbers.

Climbers must be inspected daily for wear due to abrasion from footplate movement.

NOTE: Ensure proper fit of product before use. This product can not be returned unless it is in new / unused condition.

Buckingham Manufacturing Co., Inc.

1-11 Travis Ave.

Binghamton, NY 13901

Telephone 1-800-937-2825

FAX (607) 773 - 2425

www.buckinghammfg.com